

EN

 **Beta**  
**INOX**  
STAINLESS STEEL



19

 Beta 42 INOX

19



**TaeguTools**

★★ Ferramentas Premium ★★



**Stainless steel** is an alloy steel with a high chromium content. Chromium forms a surface oxide film which protects metal and immediately reforms in case of chemical or mechanical damage.

We at **Beta Utensili** have relied on this unique characteristic to develop the **Beta Inox** tools, which are the name for high resistance to corrosion as well as remarkable **hygiene** and **low bacterial retentiveness**. Indeed, stainless steel tools **get less dirty and are cleaned better** than those made from other materials, and can be **autoclaved at 121 °C**.



The **Beta Inox** tools can be used in **critical environments** – that is, in areas where absolutely no contamination is permitted.

**Fields of application:**

- Nuclear applications
- Pharmaceutical production - class C
- Biotechnological and biomedical laboratories
- Food industry.



The **Beta Inox** tools avoid ferrous contamination, thus preventing improper **rust formation**. Whenever any tools made of ordinary carbon steel are used on stainless steel screws, nuts or surfaces, a few iron particles may come off the tools, which results in aesthetic problems (**iron moulds**). If neglected, these trigger localized corrosion. Using stainless steel tools will completely prevent polluting particles from spreading.

**Fields of application:**

- Shipyards
- Building
- Offshore applications
- Solar systems
- Car industry



**Mechanical characteristics**

Beta's tools are made of magnetic **steel AISI 420**. Its outstanding mechanical characteristics translate into tools whose performance far exceeds the standards and is comparable to that of Beta's other tools.

These tools share the same ergonomic properties and design as Beta's other tools, which have been known to, and appreciated by, professional users for over 80 years.

The containers are made of **steel AISI 304**, which can boast remarkable cold formability properties and even higher corrosion resistance.



**Recyclability**

Stainless steel is **100% recyclable**. This is also a major plus.



*Mark for stainless steel products  
Released by Centro Inox – Italian Stainless Steel  
Development Association  
– for products made of stainless steel.*

**Beta  
INOX**  
STAINLESS STEEL





# C04TSS/7

024003077

Mobile roller cab with seven drawers, made entirely of stainless steel

Main features:




- Seven drawers (570 x 410 mm) with ball bearing slides;
- 6 drawers, 83 mm high;
- 1 drawer, 170 mm high;
- 4 castors Ø 125 mm
- 2 fixed and 2 steering (two with brakes);
- Front centralized lock;
- Frame made entirely of stainless steel AISI 304
- Castors, supports, ball bearings, drawer interiors and guides made of stainless steel
- Drawer handles made of aluminium



**New Item**  
**NON-MARKING**  
**WHEELS**

63  
kg

| n° | h      | max   |
|----|--------|-------|
| 6  | 83 mm  | 25 kg |
| 1  | 170 mm | 30 kg |

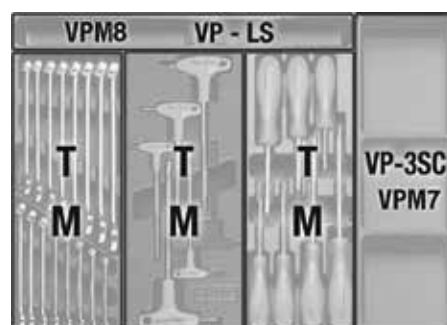

# C20TSS

021203001

Five-section cantilever tool box,  
made of AISI 304 stainless steel  
empty

- Industria alimentare
- Produzione farmaceutica - classe C
- Applicazioni marine
- Laboratori biotecnologici e biomedici



450x200x210 mm



## HARD THERMOFORMED TRAY

### T23

1,3  
kg

024240023

42INOX

8-10-11-12-13  
14-15-17-19 mm

○ 96BPINOX

2,5-3-4-5  
6-8-10 mm



### T57

350  
g

024240057

○ 96TINOX

2,5-3-4-5-6 mm



### T228

650  
g

024240228

● 1290INOX

3x75 - 4x100  
5,5x150-6,5x150 mm

⊕ 1292INOX

PH0x60-PH1x80  
PH2x100 mm



### T99

2,2  
kg

024240099

⊗ 920INOX-A

10-12-13-14-15-16-17  
18-19-21-22-24-27-30-32 mm


920/55INOX 12"



## 42INOX

Combination wrenches,  
open and offset ring ends,  
made of stainless steel

- Compact heads
- High resistance to corrosion
- Avoids improper rust
- Outstanding mechanical characteristics
- AISI 420 stainless steel



|           | mm    | L mm | A mm  | Ø mm | S1 mm | S2 mm | g    |           |
|-----------|-------|------|-------|------|-------|-------|------|-----------|
| 42INOX-6  | 6x6   | 95   | 15,2  | 10,1 | 3,4   | 5,2   | 18   | 000420306 |
| 42INOX-7  | 7x7   | 105  | 17,1  | 11,1 | 3,6   | 5,7   | 20   | 000420307 |
| 42INOX-8  | 8x8   | 116  | 19,0  | 12,3 | 3,9   | 3,3   | 22   | 000420308 |
| 42INOX-9  | 9x9   | 127  | 20,9  | 14,1 | 4,2   | 6,7   | 28   | 000420309 |
| 42INOX-10 | 10x10 | 137  | 22,8  | 15,1 | 4,5   | 4,0   | 33   | 000420310 |
| 42INOX-11 | 11x11 | 148  | 24,8  | 16,5 | 4,8   | 4,3   | 42   | 000420311 |
| 42INOX-12 | 12x12 | 158  | 26,9  | 18,2 | 5,1   | 4,6   | 56   | 000420312 |
| 42INOX-13 | 13x13 | 169  | 28,8  | 19,6 | 5,4   | 5,0   | 66   | 000420313 |
| 42INOX-14 | 14x14 | 180  | 30,8  | 21,0 | 5,7   | 5,2   | 75   | 000420314 |
| 42INOX-15 | 15x15 | 190  | 32,7  | 22,4 | 6,0   | 5,5   | 95   | 000420315 |
| 42INOX-16 | 16x16 | 201  | 34,6  | 23,8 | 6,3   | 9,7   | 120  | 000420316 |
| 42INOX-17 | 17x17 | 212  | 36,6  | 25,2 | 6,7   | 6,0   | 126  | 000420317 |
| 42INOX-18 | 18x18 | 222  | 38,5  | 26,7 | 7,0   | 10,8  | 135  | 000420318 |
| 42INOX-19 | 19x19 | 233  | 40,5  | 28,0 | 7,3   | 6,6   | 171  | 000420319 |
| 42INOX-21 | 21x21 | 254  | 44,5  | 30,7 | 7,9   | 12,4  | 180  | 000420321 |
| 42INOX-22 | 22x22 | 264  | 46,4  | 32,2 | 8,1   | 12,8  | 190  | 000420322 |
| 42INOX-24 | 24x24 | 285  | 50,3  | 34,9 | 8,5   | 13,5  | 230  | 000420324 |
| 42INOX-27 | 27x27 | 290  | 53,0  | 42,0 | 9,0   | 12,0  | 430  | 000420327 |
| 42INOX-30 | 30x30 | 320  | 59,0  | 46,0 | 10,0  | 13,0  | 530  | 000420330 |
| 42INOX-32 | 32x32 | 340  | 63,0  | 49,0 | 11,0  | 14,0  | 635  | 000420332 |
| 42INOX-36 | 36x36 | 360  | 70,0  | 55,0 | 16,0  | 21,0  | 960  | 000420336 |
| 42INOX-38 | 38x38 | 430  | 85,0  | 64,0 | 16,0  | 21,0  | 1300 | 000420338 |
| 42INOX-41 | 41x41 | 430  | 85,0  | 64,0 | 16,0  | 21,0  | 1300 | 000420341 |
| 42INOX-46 | 46x46 | 480  | 90,0  | 70,0 | 16,0  | 22,0  | 1760 | 000420343 |
| 42INOX-50 | 50x50 | 520  | 98,0  | 77,0 | 17,0  | 23,0  | 2000 | 000420345 |
| 42INOX-55 | 55x55 | 560  | 108,0 | 83,0 | 18,0  | 23,0  | 2500 | 000420347 |
| 42INOX-60 | 60x60 | 595  | 115,0 | 89,0 | 20,0  | 25,0  | 2900 | 000420350 |

## 42INOX-AS sizes in inches

|                 | "           | L mm | A mm | Ø mm | S1 mm | S2 mm | g   |           |
|-----------------|-------------|------|------|------|-------|-------|-----|-----------|
| 42INOX-AS 1/4   | 1/4x1/4     | 95   | 15,2 | 10,1 | 3,4   | 5,2   | 10  | 000420356 |
| 42INOX-AS 5/16  | 5/16x5/16   | 116  | 19,0 | 12,3 | 3,9   | 6,2   | 20  | 000420358 |
| 42INOX-AS 3/8   | 3/8x3/8     | 137  | 22,8 | 15,1 | 4,5   | 7,1   | 30  | 000420360 |
| 42INOX-AS 7/16  | 7/16x7/16   | 148  | 24,8 | 16,5 | 4,8   | 7,5   | 40  | 000420361 |
| 42INOX-AS 1/2   | 1/2x1/2     | 169  | 28,8 | 19,6 | 5,4   | 8,4   | 60  | 000420363 |
| 42INOX-AS 9/16  | 9/16x9/16   | 180  | 30,8 | 21,0 | 5,7   | 8,8   | 75  | 000420364 |
| 42INOX-AS 5/8   | 5/8x5/8     | 201  | 34,6 | 23,8 | 6,3   | 9,7   | 100 | 000420366 |
| 42INOX-AS 11/16 | 11/16x11/16 | 212  | 36,6 | 25,2 | 6,7   | 10,2  | 115 | 000420367 |
| 42INOX-AS 3/4   | 3/4x3/4     | 233  | 40,5 | 28,0 | 7,3   | 11,4  | 155 | 000420369 |
| 42INOX-AS 13/16 | 13/16x13/16 | 254  | 44,5 | 30,7 | 7,9   | 12,4  | 200 | 000420371 |
| 42INOX-AS 7/8   | 7/8x7/8     | 264  | 46,4 | 32,2 | 8,1   | 12,8  | 220 | 000420372 |
| 42INOX-AS 15/16 | 15/16x15/16 | 285  | 50,3 | 34,7 | 8,5   | 13,5  | 280 | 000420373 |

## Combination wrenches

### 42INOX/SC9

000420387

8-10-11-12-13-14  
15-17-19 mm



### 42INOX/S11

000420391

6-8-10-11-12-13-14  
15-16-17-19 mm



### 42INOX-AS/S9

000420396


1/4-5/16-3/8-7/16-1/2  
9/16-5/8-11/16-3/4



# 96BPINOX

Ball head offset  
hexagon key wrenches,  
made of stainless steel

- High resistance to corrosion
- Outstanding mechanical characteristics
- Avoids improper rust
- Ball head makes it possible to work at angle of up to 30° to screw axis
- For tightening use short side, if possible
- AISI 420 stainless steel



|              | mm  | L mm | L1 mm | g   |           |
|--------------|-----|------|-------|-----|-----------|
| 96BPINOX 2   | 2   | 91   | 22    | 4   | 000961441 |
| 96BPINOX 2,5 | 2,5 | 91   | 22    | 6   | 000961442 |
| 96BPINOX 3   | 3   | 101  | 24    | 11  | 000961443 |
| 96BPINOX 4   | 4   | 112  | 29    | 19  | 000961444 |
| 96BPINOX 5   | 5   | 131  | 33    | 32  | 000961445 |
| 96BPINOX 6   | 6   | 154  | 36    | 51  | 000961446 |
| 96BPINOX 7   | 7   | 164  | 40    | 65  | 000961447 |
| 96BPINOX 8   | 8   | 175  | 44    | 116 | 000961448 |
| 96BPINOX 10  | 10  | 197  | 51    | 189 | 000961450 |

# 96BPINOX-AS

|                  | "    | L mm | L1 mm | g     |           |
|------------------|------|------|-------|-------|-----------|
| 96BPINOX-AS 5/64 | 5/64 | 91   | 22    | 5,5   | 000961989 |
| 96BPINOX-AS 3/32 | 3/32 | 91   | 22    | 5,3   | 000961990 |
| 96BPINOX-AS 7/64 | 7/64 | 101  | 24    | 10,5  | 000961991 |
| 96BPINOX-AS 1/8  | 1/8  | 101  | 24    | 10,7  | 000961992 |
| 96BPINOX-AS 9/64 | 9/64 | 112  | 29    | 18,7  | 000961993 |
| 96BPINOX-AS 5/32 | 5/32 | 112  | 29    | 18,7  | 000961994 |
| 96BPINOX-AS 3/16 | 3/16 | 131  | 33    | 31,5  | 000961995 |
| 96BPINOX-AS 7/32 | 7/32 | 154  | 36    | 50,0  | 000961996 |
| 96BPINOX-AS 1/4  | 1/4  | 164  | 40    | 70,0  | 000961997 |
| 96BPINOX-AS 5/16 | 5/16 | 175  | 44    | 115,0 | 000961998 |
| 96BPINOX-AS 3/8  | 3/8  | 197  | 51    | 186,5 | 000961999 |



## Set of ball head offset hexagon key wrenches

### 96BPINOX/B6

000961455

○ 2,5-3-4-5-6-8 mm



### 96BPINOX/B9

000961456

○ 2-2,5-3-4-5-6-7-8-10 mm



### 96BPINOX-AS/B8

000962000

○ 5/64-3/32-1/8-5/32-3/16-7/32-1/4-5/16




# 111INOX

Adjustable wrenches,  
made of stainless steel

- High resistance to corrosion
- Avoids improper rust
- Outstanding mechanical characteristics
- AISI 420 stainless steel



|             | L mm | L " | A Max mm | A1 mm | g   |           |
|-------------|------|-----|----------|-------|-----|-----------|
| 111INOX 150 | 150  | 6   | 18       | 45    | 131 | 001110315 |
| 111INOX 200 | 200  | 8   | 24       | 58    | 246 | 001110320 |
| 111INOX 250 | 250  | 10  | 30       | 70    | 456 | 001110325 |






## 96TINOX

Offset hexagon key wrenches, with high-torque handles, made of stainless steel




- High resistance to corrosion
- Outstanding mechanical characteristics
- Avoids improper rust
- Calibrated hexagon ends, to match screw perfectly.
- Ergonomic handle accurately proportioned according to wrench size, results in high tightening power - e.g. in small spaces.
- AISI 420 stainless steel

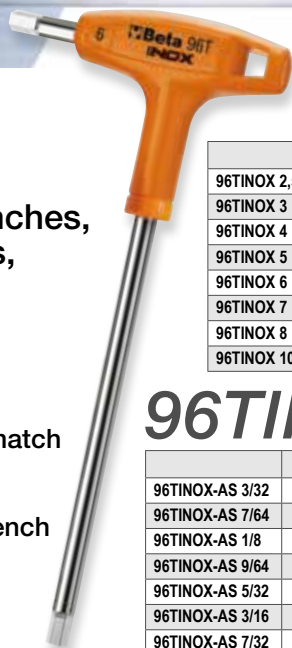

|             | mm  | L mm | L1 mm | Ø mm | T mm | S mm | g   |           |
|-------------|-----|------|-------|------|------|------|-----|-----------|
| 96TINOX 2,5 | 2,5 | 153  | 55    | 3    | 6,0  | 13,6 | 18  | 000961935 |
| 96TINOX 3   | 3   | 153  | 55    | 4    | 6,5  | 13,6 | 20  | 000961936 |
| 96TINOX 4   | 4   | 179  | 70    | 5    | 7,5  | 18,0 | 38  | 000961938 |
| 96TINOX 5   | 5   | 200  | 84    | 6    | 8,5  | 20,6 | 68  | 000961940 |
| 96TINOX 6   | 6   | 221  | 95    | 7    | 9,0  | 25,2 | 95  | 000961941 |
| 96TINOX 7   | 7   | 236  | 106   | 9    | 13,0 | 26,0 | 140 | 000961942 |
| 96TINOX 8   | 8   | 255  | 117   | 10   | 14,0 | 26,0 | 223 | 000961943 |
| 96TINOX 10  | 10  | 285  | 132   | 12   | 16   | 29,0 | 240 | 000961944 |

## 96TINOX-AS

|                 | "    | L mm | L1 mm | Ø mm | T mm | S mm | g     |           |
|-----------------|------|------|-------|------|------|------|-------|-----------|
| 96TINOX-AS 3/32 | 3/32 | 153  | 55    | 3    | 6,0  | 13,4 | 24,0  | 000961861 |
| 96TINOX-AS 7/64 | 7/64 | 153  | 55    | 4    | 6,5  | 13,4 | 31,0  | 000961862 |
| 96TINOX-AS 1/8  | 1/8  | 179  | 70    | 4    | 7,0  | 18,0 | 31,5  | 000961863 |
| 96TINOX-AS 9/64 | 9/64 | 179  | 70    | 5    | 7,5  | 18,0 | 41,5  | 000961864 |
| 96TINOX-AS 5/32 | 5/32 | 200  | 84    | 6    | 8,0  | 20,6 | 68,0  | 000961865 |
| 96TINOX-AS 3/16 | 3/16 | 200  | 84    | 6    | 8,5  | 20,6 | 69,0  | 000961866 |
| 96TINOX-AS 7/32 | 7/32 | 221  | 103   | 7    | 9,0  | 25,2 | 110,0 | 000961867 |
| 96TINOX-AS 1/4  | 1/4  | 236  | 106   | 8    | 10,0 | 25,2 | 140,0 | 000961868 |
| 96TINOX-AS 5/16 | 5/16 | 255  | 117   | 10   | 12,0 | 27,6 | 221,5 | 000961869 |
| 96TINOX-AS 3/8  | 3/8  | 285  | 132   | 12   | 15,0 | 27,6 | 335,5 | 000961870 |

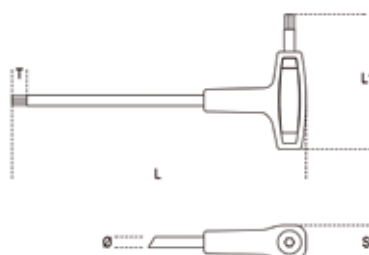

## Set of 5 offset hexagon key wrenches with high torque handles

### 96TINOX/S5

000961952

○ 2,5-3-4-5-6 mm



### 96TINOX-AS/S7

000961877

○ 3/32-1/8-5/32-3/16  
7/32-1/4-5/16



### 96TINOX/S8

000961954

○ 2,5-3-4-5-6-7-8-10 mm




# 920/55INOX

009203882

1/2" drive reversible ratchet  
made of stainless steel

- High resistance to corrosion
- Avoids improper rust formation
- Outstanding mechanical characteristics
- AISI 420 stainless steel




| L mm | Ø mm | A mm | ■   | g   |
|------|------|------|-----|-----|
| 264  | 40   | 43   | 1/2 | 550 |

# 920INOX-A 1/2"

Hexagon hand sockets  
1/2" female drive,  
made of stainless steel

- High resistance to corrosion
- Avoids improper rust formation
- Outstanding mechanical characteristics
- AISI 420 stainless steel



|              | mm | Ø mm | A mm | L mm | Ø1 mm | g   |           |
|--------------|----|------|------|------|-------|-----|-----------|
| 920INOX-A 8  | 8  | 15   | 10   | 40   | 24    | 77  | 009203008 |
| 920INOX-A 9  | 9  | 16   | 10   | 40   | 24    | 78  | 009203009 |
| 920INOX-A 10 | 10 | 17   | 10   | 40   | 24    | 78  | 009203010 |
| 920INOX-A 11 | 11 | 18   | 11   | 40   | 24    | 79  | 009203011 |
| 920INOX-A 12 | 12 | 19   | 11   | 40   | 24    | 79  | 009203012 |
| 920INOX-A 13 | 13 | 20   | 11   | 40   | 24    | 80  | 009203013 |
| 920INOX-A 14 | 14 | 21   | 11   | 40   | 24    | 80  | 009203014 |
| 920INOX-A 15 | 15 | 23   | 11   | 40   | 25    | 94  | 009203015 |
| 920INOX-A 16 | 16 | 24   | 11   | 40   | 25    | 94  | 009203016 |
| 920INOX-A 17 | 17 | 25   | 11   | 40   | 25    | 94  | 009203017 |
| 920INOX-A 18 | 18 | 26   | 13   | 42   | 25    | 94  | 009203018 |
| 920INOX-A 19 | 19 | 28   | 13   | 42   | 25    | 110 | 009203019 |
| 920INOX-A 20 | 20 | 29   | 13   | 42   | 26    | 120 | 009203020 |
| 920INOX-A 21 | 21 | 30   | 13   | 43   | 26    | 125 | 009203021 |
| 920INOX-A 22 | 22 | 31   | 15   | 43   | 26    | 130 | 009203022 |
| 920INOX-A 24 | 24 | 34   | 15   | 43   | 28    | 165 | 009203024 |
| 920INOX-A 27 | 27 | 38   | 18   | 46   | 30    | 215 | 009203027 |
| 920INOX-A 30 | 30 | 42   | 20   | 46   | 30    | 250 | 009203030 |
| 920INOX-A 32 | 32 | 44   | 20   | 46   | 34    | 295 | 009203032 |

# 920INOX/C16

009203916

Set of 15 sockets and 1  
ratchet, made of stainless  
steel, in plastic case

1/2"

|  |            |                                                   |
|--|------------|---------------------------------------------------|
|  | 920INOX-A  | 10-12-13-14-15-16-17-18-19<br>21-22-24-27-30-32mm |
|  | 920/55INOX |                                                   |







## 1290INOX

**Screwdrivers for slotted head screws made of stainless steel**

- High resistance to corrosion.
- Outstanding mechanical characteristics.
- Avoids improper rust.
- Bimaterial handle with hard polypropylene core injected onto blade for safe anchorage.
- Soft thermoplastic rubber coating.
- AISI 420 stainless steel

|                  | SxAxL mm    | L1 mm | Ø mm | g  |           |
|------------------|-------------|-------|------|----|-----------|
| 1290INOX 2,5x50  | 0.4x2.5x50  | 146   | 2,5  | 33 | 012900403 |
| 1290INOX 3x75    | 0.5x3x75    | 171   | 3,0  | 36 | 012900409 |
| 1290INOX 4x100   | 0.8x4x100   | 196   | 4,0  | 43 | 012900430 |
| 1290INOX 5,5x150 | 1.x5.5x150  | 259   | 5,0  | 71 | 012900442 |
| 1290INOX 6,5x150 | 1.2x6.5x150 | 270   | 6,0  | 99 | 012900451 |




## 1292INOX

**Screwdrivers for cross head Phillips® screws, made of stainless steel**

- High resistance to corrosion.
- Outstanding mechanical characteristics.
- Avoids improper rust.
- Bimaterial handle with hard polypropylene core injected onto blade for safe anchorage.
- Soft thermoplastic rubber coating.
- AISI 420 stainless steel

|                 | PxDxL mm | L1 mm | g  |           |
|-----------------|----------|-------|----|-----------|
| 1292INOX 3x60   | 0x3x60   | 156   | 36 | 012920403 |
| 1292INOX 4,5x80 | 1x4.5x80 | 189   | 59 | 012920409 |
| 1292INOX 6x100  | 2x6x100  | 220   | 90 | 012920418 |

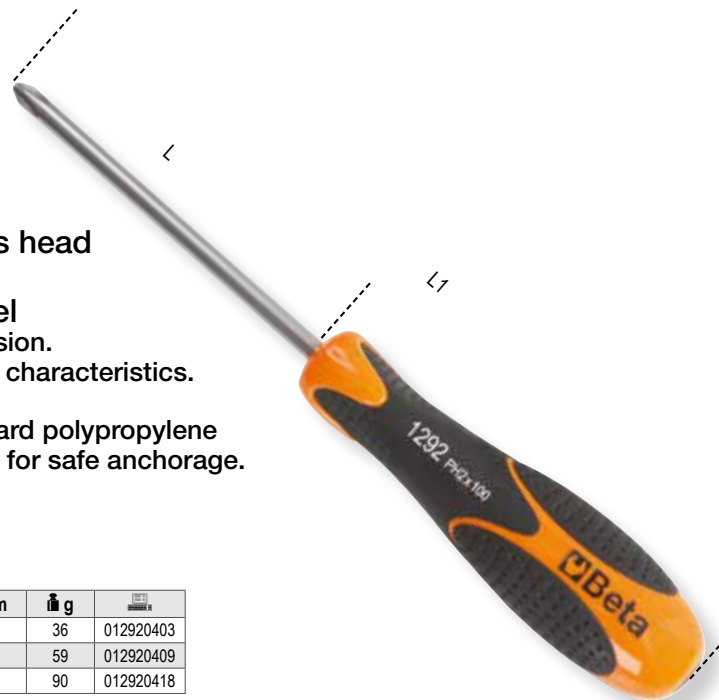

## Screwdriver set

### 1293INOX/D8

012930408



1290INOX ● 2,5x50-3x75-4x100-5,5x150-6,5x150 mm

1292INOX ⊕ PH0x60-PH1x80-PH2x100 mm






## 1048INOX

010480325

Slip joint pliers, boxed joints, made of stainless steel

- High resistance to corrosion
- Avoids improper rust
- Outstanding mechanical characteristics
- AISI 420 stainless steel
- 7-position model




| L mm | A mm | L1 mm | S mm | g   |
|------|------|-------|------|-----|
| 250  | 33   | 33    | 13   | 391 |

## 1082INOX

010820350

Diagonal cutting nippers, made of stainless steel

- High resistance to corrosion
- Avoids improper rust
- Outstanding mechanical characteristics
- AISI 420 stainless steel




| L mm | A mm | L1 mm | S mm | g   |
|------|------|-------|------|-----|
| 150  | 22   | 20    | 10   | 230 |

## 1150INOX

011500518

Heavy-duty combination pliers, made of stainless steel

- High resistance to corrosion
- Avoids improper rust
- Outstanding mechanical characteristics
- AISI 420 stainless steel





| L mm | A mm | L1 mm | S mm | g   |
|------|------|-------|------|-----|
| 180  | 25   | 39    | 11   | 227 |

## 1153INOX

011530315

Adjustable pliers, two positions made of stainless steel

- High resistance to corrosion
- Avoids improper rust
- Outstanding mechanical characteristics
- AISI 420 stainless steel



| L mm | L1 mm | A mm | A1 mm | S mm | g   |
|------|-------|------|-------|------|-----|
| 150  | 26    | 24   | 9,0   | 9,2  | 157 |



## 1370INOX

013700375

Engineer's hammer,  
made of stainless steel

- High resistance to corrosion
- Avoids improper rust
- Outstanding mechanical characteristics
- AISI 420 stainless steel

| g   | A mm | L mm | L1 mm | g   |
|-----|------|------|-------|-----|
| 500 | 25   | 240  | 101   | 799 |



## 34INOX

Flat chisels,  
made of stainless steel

- High resistance to corrosion
- Avoids improper rust
- Outstanding mechanical characteristics
- AISI 420 stainless steel
- 7-position model



|            | L mm | A mm | Ø mm | g   |           |
|------------|------|------|------|-----|-----------|
| 34INOX 160 | 160  | 18   | 18   | 295 | 000340318 |
| 34INOX 200 | 200  | 20   | 20   | 473 | 000340320 |

## 39INOX

Wedges,  
made of stainless steel

- High resistance to corrosion
- Avoids improper rust formation
- Outstanding mechanical characteristics
- AISI 420 stainless steel



|            | L mm | A mm | S mm | g     |           |
|------------|------|------|------|-------|-----------|
| 39INOX 100 | 100  | 50   | 10   | 201   | 000390310 |
| 39INOX 150 | 150  | 50   | 13   | 400   | 000390315 |
| 39INOX 200 | 200  | 40   | 40   | 1.315 | 000390320 |

## 1377INOX

Ball pein hammers,  
round heads  
for coppersmiths and tinsmiths,  
made of stainless steel

|              | g   | L mm | L1 mm | g   |           |
|--------------|-----|------|-------|-----|-----------|
| 1377INOX 230 | 230 | 220  | 82    | 650 | 013770623 |
| 1377INOX 340 | 340 | 220  | 90    | 770 | 013770634 |





# **Robur** **INOX** **STAINLESS STEEL**

Robur wire rope accessories are made of **stainless steel AISI 316/316L**. They guarantee a remarkable resistance to corrosion also in aggressive environments as well as **resistance to shocks even at low temperatures** (higher than the one guaranteed by AISI420 and AISI 304/304L steel). The austenitic stainless steel AISI 316/316L features a **good fatigue resistance**, reasonable resistance to wear, mechanical characteristics, remarkable cold formability and excellent weldability.

Robur accessories are designed for outdoor use in any weather condition.

## 8205


Eye and eye turnbuckle  
AISI 316

LABORATORY TESTS

- chemical analysis
- tensile test

AVAILABLE CERTIFICATES

- Technical product specifications
- Test report UNI EN10204 type 2.2

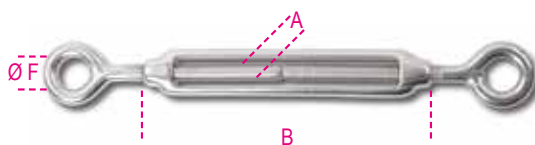

| A   | B mm | Ø F mm | WFL kg | g    |           |
|-----|------|--------|--------|------|-----------|
| M4  | 62   | 8      | 75     | 20   | 082050204 |
| M5  | 72   | 11     | 115    | 50   | 082050205 |
| M6  | 92   | 12     | 160    | 85   | 082050206 |
| M8  | 122  | 14     | 300    | 151  | 082050208 |
| M10 | 150  | 16     | 470    | 275  | 082050210 |
| M12 | 201  | 18     | 690    | 510  | 082050212 |
| M14 | 225  | 24     | 940    | 820  | 082050214 |
| M16 | 244  | 26     | 1290   | 1440 | 082050216 |
| M20 | 295  | 29     | 2130   | 1900 | 082050220 |
| M24 | 350  | 33     | 3000   | 3850 | 082050224 |



## 8209


Jaw and jaw turnbuckle AISI 316

LABORATORY TESTS

- chemical analysis
- tensile test

AVAILABLE CERTIFICATES

- Technical product specifications
- Test report UNI EN10204 type 2.2



| A   | B mm | Ø F mm | WFL kg | g    |           |
|-----|------|--------|--------|------|-----------|
| M5  | 72   | 5      | 115    | 56   | 082090205 |
| M6  | 92   | 6      | 160    | 95   | 082090206 |
| M8  | 122  | 8      | 300    | 170  | 082090208 |
| M10 | 150  | 10     | 470    | 330  | 082090210 |
| M12 | 201  | 12     | 690    | 655  | 082090212 |
| M14 | 225  | 14     | 940    | 900  | 082090214 |
| M16 | 244  | 16     | 1290   | 1460 | 082090216 |
| M20 | 295  | 20     | 2130   | 3077 | 082090220 |
| M24 | 350  | 24     | 3060   | 3950 | 082090224 |



## 8216 CE

### Wire rope clips AISI 316



#### LABORATORY TESTS

- chemical analysis
- torque test

#### AVAILABLE CERTIFICATES

- Technical product specifications
- Test report UNI EN10204 type 2.2
- CE Certificate of Conformity

| Ø F   | A   | T   | N | g   |           |
|-------|-----|-----|---|-----|-----------|
| 2     | M3  | 80  | 3 | 5   | 082160202 |
| 3     | M3  | 80  | 3 | 11  | 082160203 |
| 4     | M4  | 80  | 3 | 17  | 082160204 |
| 5     | M5  | 110 | 3 | 26  | 082160205 |
| 6     | M6  | 120 | 5 | 39  | 082160206 |
| 8     | M6  | 210 | 5 | 59  | 082160208 |
| 10    | M8  | 240 | 5 | 94  | 082160210 |
| 12-13 | M10 | 300 | 5 | 113 | 082160213 |
| 16    | M12 | 335 | 5 | 196 | 082160216 |
| 20    | M12 | 540 | 5 | 250 | 082160220 |
| 22    | M12 | 595 | 7 | 435 | 082160222 |



## 8240F CE

### Lifting eye bolts, FORGED

#### stainless steel A4

#### TECHNICAL DATA

- safety factor: 6
  - traceability code
- #### LABORATORY TESTS
- chemical analysis
  - metallographic analysis
  - tensile test

#### AVAILABLE CERTIFICATES

- Technical product specifications
- Test report UNI EN10204 type 2.2
- Inspection certificate UNI EN10204 type 3.1
- CE Declaration of Conformity

| Ø   | mm   | Ø F | WLL kg | g    |           |
|-----|------|-----|--------|------|-----------|
| M6  | 1    | 14  | 120    | 20   | 082400406 |
| M8  | 1,25 | 20  | 200    | 60   | 082400408 |
| M10 | 1,5  | 25  | 400    | 110  | 082400410 |
| M12 | 1,75 | 30  | 600    | 180  | 082400412 |
| M14 | 2    | 30  | 1000   | 190  | 082400414 |
| M16 | 2    | 35  | 1200   | 280  | 082400416 |
| M20 | 2,5  | 40  | 2000   | 450  | 082400420 |
| M24 | 3    | 50  | 2700   | 740  | 082400424 |
| M30 | 3,5  | 65  | 4000   | 1660 | 082400430 |



## 8248

### Eye tie rods, stainless steel 316L, right thread

#### AVAILABLE CERTIFICATES

- Technical Product Specifications
- Test Report UNI EN10204 type 2.2

| ØxLmm  | F mm | g   |           |
|--------|------|-----|-----------|
| 10x80  | 8    | 65  | 082480010 |
| 10x130 | 8    | 85  | 082480012 |
| 12x95  | 10   | 105 | 082480016 |
| 12x125 | 10   | 125 | 082480018 |



## 8225

### Dee shackles AISI 316


#### LABORATORY TESTS

- chemical analysis
- tensile test

#### AVAILABLE CERTIFICATES

- Technical product specifications
- Test report UNI EN10204 type 2.2

| Ø D mm | A  | WFL kg | g    |           |
|--------|----|--------|------|-----------|
| 4      | 8  | 50     | 7    | 082250204 |
| 5      | 11 | 70     | 14   | 082250205 |
| 6      | 13 | 100    | 23   | 082250206 |
| 8      | 17 | 250    | 56   | 082250208 |
| 10     | 21 | 400    | 108  | 082250210 |
| 12     | 25 | 600    | 194  | 082250212 |
| 16     | 32 | 1000   | 440  | 082250216 |
| 19     | 38 | 1600   | 730  | 082250219 |
| 22     | 43 | 2000   | 1140 | 082250222 |
| 25     | 46 | 2800   | 1636 | 082250225 |



## 8242F CE

### Lifting eye nuts, FORGED

#### stainless steel A4

#### TECHNICAL DATA

- safety factor: 6
- traceability code

#### LABORATORY TESTS

- chemical analysis
- metallographic analysis
- tensile test

#### AVAILABLE CERTIFICATES

- Technical product specifications
- Test report UNI EN10204 type 2.2
- Inspection certificate UNI EN10204 type 3.1
- CE Declaration of conformity



| Ø   | mm   | Ø F | WLL kg | g    |           |
|-----|------|-----|--------|------|-----------|
| M6  | 1    | 14  | 120    | 18   | 082420406 |
| M8  | 1,25 | 20  | 200    | 50   | 082420408 |
| M10 | 1,5  | 25  | 400    | 90   | 082420410 |
| M12 | 1,75 | 30  | 600    | 160  | 082420412 |
| M14 | 2    | 30  | 1000   | 160  | 082420414 |
| M16 | 2    | 35  | 1200   | 240  | 082420416 |
| M20 | 2,5  | 40  | 2000   | 360  | 082420420 |
| M24 | 3    | 50  | 2700   | 720  | 082420424 |
| M30 | 3,5  | 65  | 4000   | 1320 | 082420430 |



## 8249

### Fastening eyebolts, right thread AISI 316

#### LABORATORY TESTS

- chemical analysis
- tensile test

#### AVAILABLE CERTIFICATES

- Technical product specifications
- Test report UNI EN10204 type 2.2

| A   | Ø B mm | D mm | WFL kg | g    |           |
|-----|--------|------|--------|------|-----------|
| M5  | 11     | 50   | 100    | 400  | 082490205 |
| M6  | 13     | 55   | 160    | 1000 | 082490206 |
| M8  | 17     | 60   | 300    | 1800 | 082490208 |
| M10 | 21     | 80   | 470    | 2400 | 082490210 |
| M12 | 25     | 120  | 690    | 3500 | 082490212 |



## 8274

### Carabine hooks

#### AISI 316

#### LABORATORY TESTS

- chemical analysis
- tensile test

#### AVAILABLE CERTIFICATES

- Technical product specifications
- Test report UNI EN10204 type 2.2

| ø A x L mm | ø C mm | D mm | WFL kg | g   |           |
|------------|--------|------|--------|-----|-----------|
| 4,5x40     | 6,5    | 6    | 20     | 10  | 082740204 |
| 5x50       | 7      | 6,5  | 30     | 16  | 082740205 |
| 6x60       | 8,5    | 7,5  | 40     | 27  | 082740206 |
| 7x70       | 10     | 9    | 60     | 42  | 082740207 |
| 8x80       | 12     | 10   | 75     | 63  | 082740208 |
| 9x90       | 12,5   | 10,5 | 100    | 90  | 082740209 |
| 10x100     | 15     | 13   | 120    | 123 | 082740210 |
| 11x120     | 19     | 18   | 140    | 185 | 082740211 |
| 12x140     | 22     | 21   | 140    | 260 | 082740212 |
| 13x160     | 22     | 26   | 200    | 340 | 082740213 |



## 8274A

### Ring carabine hooks

#### AISI 316

#### LABORATORY TESTS

- chemical analysis
- tensile test

#### AVAILABLE CERTIFICATES

- Technical Product Specifications
- Test Report UNI EN10204 type 2.2

| ø A x L mm | ø C mm | D mm | WFL kg | g  |           |
|------------|--------|------|--------|----|-----------|
| 5x50       | 6,5    | 7    | 30     | 18 | 082740405 |
| 6x60       | 7,5    | 7,5  | 40     | 30 | 082740406 |
| 8x80       | 9,5    | 10   | 75     | 65 | 082740408 |



## 8280

### Quick links AISI 316


#### LABORATORY TESTS

- chemical analysis
- tensile test

#### AVAILABLE CERTIFICATES

- Technical product specifications
- Test report UNI EN10204 type 2.2

| ø D x L mm | A mm | B mm | WFL kg | g   |           |
|------------|------|------|--------|-----|-----------|
| 3,5x35     | 17   | 5    | 20     | 20  | 082800203 |
| 4x40       | 19   | 6    | 30     | 30  | 082800204 |
| 5x50       | 23   | 7    | 50     | 50  | 082800205 |
| 6x60       | 26   | 8    | 60     | 60  | 082800206 |
| 7x70       | 30   | 9    | 100    | 100 | 082800207 |
| 8x80       | 33   | 10   | 140    | 140 | 082800208 |
| 10x90      | 40   | 12   | 220    | 220 | 082800210 |
| 12x100     | 47   | 14   | 300    | 300 | 082800212 |



## 8274G

### Carabine hooks with screw nut AISI 316


#### LABORATORY TESTS

- chemical analysis
- tensile test

#### AVAILABLE CERTIFICATES

- Technical product specifications
- Test report UNI EN10204 type 2.2

| ø A x L mm | ø C mm | D mm | WFL kg | g    |           |
|------------|--------|------|--------|------|-----------|
| 6x60       | 8,5    | 6,5  | 40     | 390  | 082740306 |
| 8x80       | 12     | 8,5  | 75     | 720  | 082740308 |
| 10x100     | 15     | 12   | 120    | 1080 | 082740310 |



## 8293

### Ratchet tie downs AISI 304 high-tenacity polyester belt, LC 300 kg, with hooks hangable



| L mm | L2 mm | L1 mm | g   |           |
|------|-------|-------|-----|-----------|
| 6    | 5700  | 300   | 840 | 082930106 |



## 8297C


### Ring tie downs with mini-ratchets, AISI 304 high-tenacity polyester belt LC 700 kg hangable



| L m | H mm | LC=Kg | g   |           |
|-----|------|-------|-----|-----------|
| 5   | 25   | 700   | 400 | 082970350 |

## 8297F

### 2 cam buckle straps, AISI 304 high-tenacity polyester belt LC 250 kg hangable

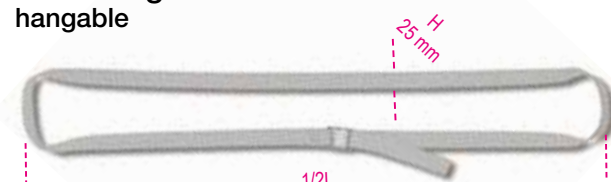

| L m | H mm | LC=Kg | g   |           |
|-----|------|-------|-----|-----------|
| 3   | 25   | 250   | 165 | 082970230 |



# TaeguTools

★ ★ Ferramentas Premium ★ ★

SIGA NAS REDES SOCIAIS:

  **@taegutools**

SOLICITE COTAÇÃO:

**[vendas@taegutools.com.br](mailto:vendas@taegutools.com.br)**

**(19) 3433-1118**